

2-POST ELECTOMECHANICAL SCREW LIFT 3.0T 4EC0510



More versatile asymmetric arms



Self-diagnosis system



Low maintenance



2-post lift without base 3.000 KG. MOD. 4EC0510



**The best price/performance ratio.
Easy to use with the best price.**

- Synchronisation between columns by proximity switch.
- Maximum stability: High-quality sliders to ensure the stability of the carriages.



Technical data

Width between columns	2700 mm
Load capacity	3000 Kg
Minimum height	100 mm
Lifting height	2050 mm
Lifting time	45"
Arm length (min-max)	650-1240 mm
Overall width	3200 mm
Columns height (including top bridge)	3930 mm
Motor	3 Phase 230/400 V 50/60 Hz · 2 x 2.2 KW

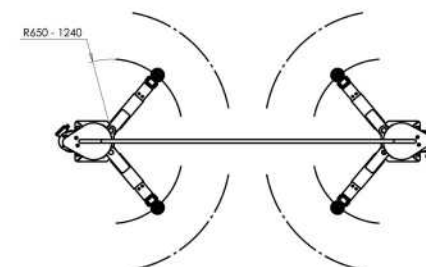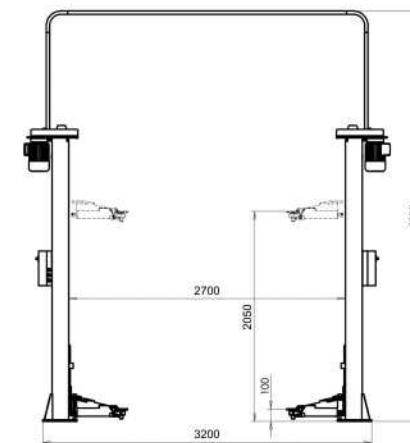

ACCESSORIES




High efficiency
motors

Lower tooth pitch on the locking
devices and axel locks diameter
22mm on steel F114.
1500N-2250N without
deformation: 2020 European Std.




Increase accuracy, avoid
friction and improve wear
behaviour with our
Patented VULKOLLAN
lifting pads.

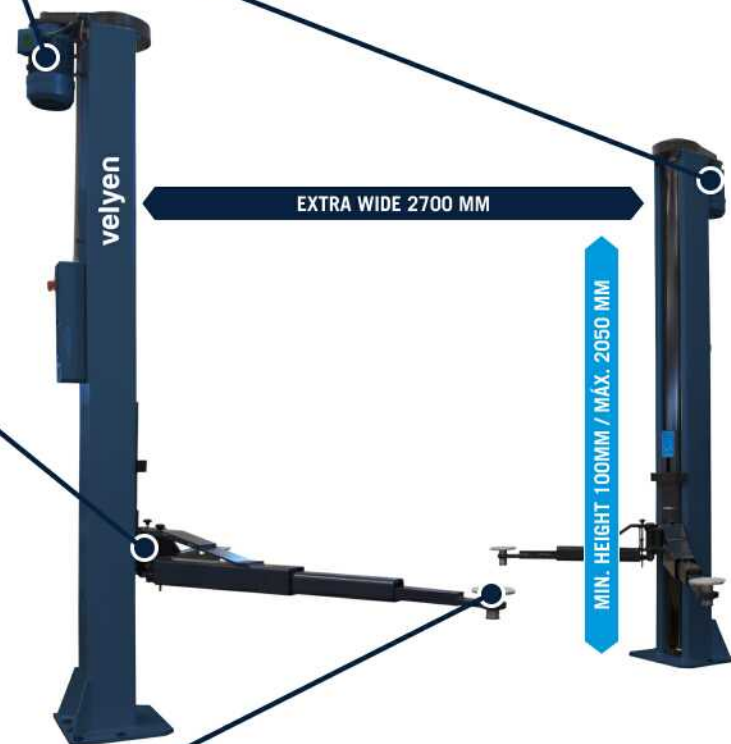

Very important before you make the decision:

What kind of vehicles you want to rise?

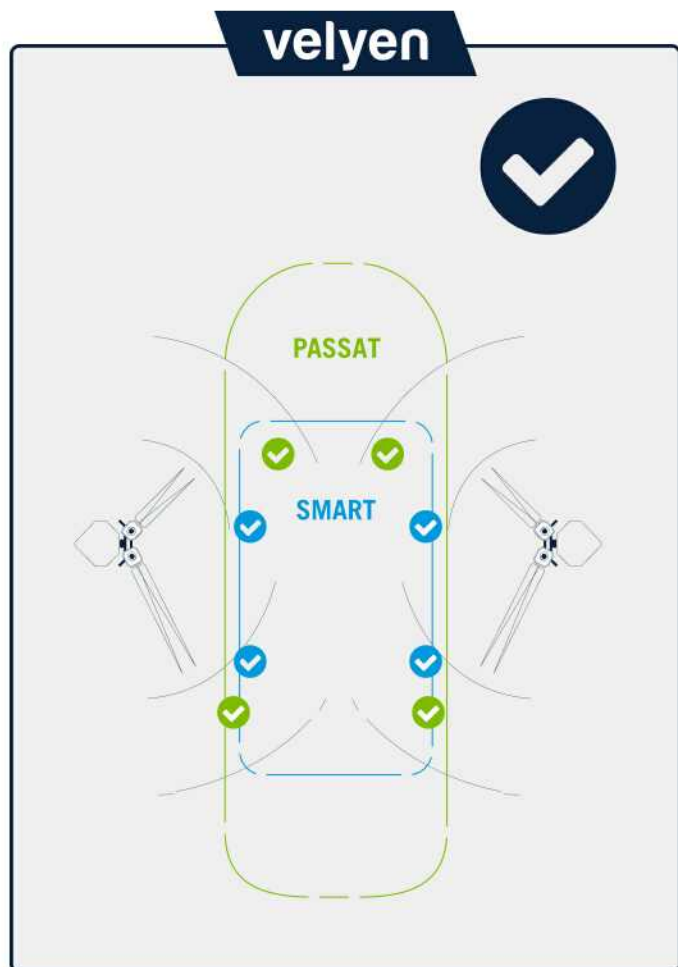


Disadvantages
narrow lifts



Advantages
Velyen lifts

✓ Correct Lifting Point

✗ Hazardous or incorrect
lifting point

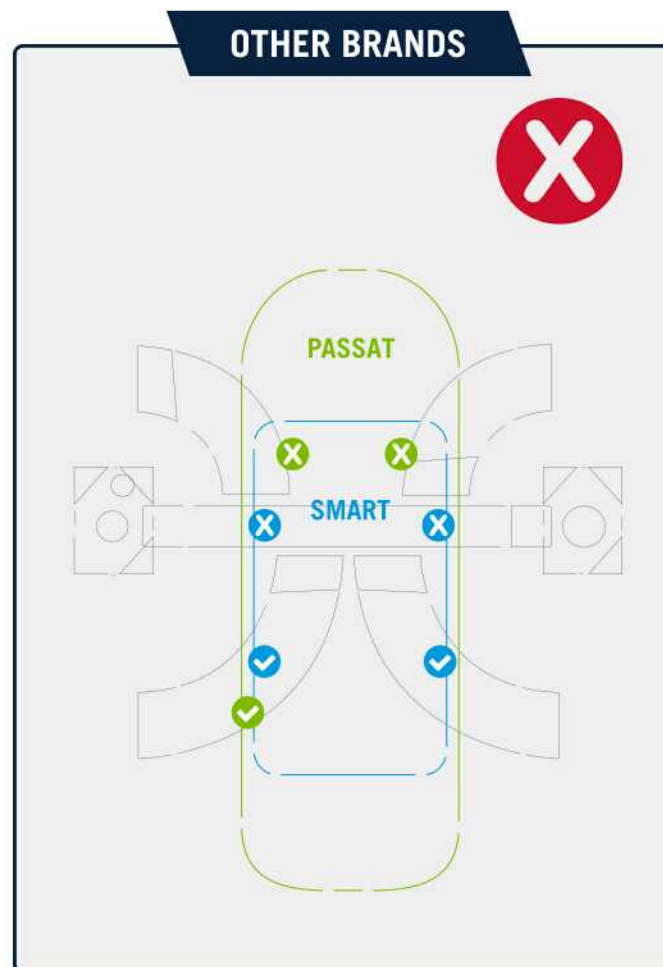

**SPAIN**

Parque Industrial Ciudad de Carlet
C/ Camino del Carrasqueral, Nº 6
46240 Carlet - Valencia (SPAIN)
T(+34)962543073-Fx(+34)962543074
EMAIL comercial-sat@velyen.com

MÉXICO

Boulevard Córdoba - Fortín Km 335
94540 Córdoba - Veracruz (México)
T (+52) 2717165599
EMAIL director@velyen.com.mx

UK

1, Southgate Industrial Park, Green Ln
Heywood OL10 1ND
T +44 (0)1706 563007
EMAIL export.b@velyen.com
WEB www.velyen.co.uk